

APPLICATION FOR CONSTRUCTION INSPECTION

Please Print or Type

TO BE COMPLETED BY CLERK OR APPLICANT

Town, Village of _____ County: _____

Town, Village Clerk _____ Date: _____

Name of Applicant: _____

Job Site: _____

Tax Map # _____

Permit: Issued On _____ Expires: _____ Permit Number # _____

Construction Value: _____
(To be determined by inspector)

P. E. Approved (if applicable)
by: _____
date: _____

Occupied As: _____

Name of Owner: _____
Mailing
Address: _____
_____ Zip _____
Phone: _____

Fee Paid TOTAL \$ _____
check no. _____
money order _____
cash _____

Fee must be remitted at time application is made.

CHECK APPLICABLE ITEMS:

- New Construction
 - Residential
 - Commercial
- Renovation, Alteration, Conversion
 - Residential
 - Commercial
- Installation Mobile Modular Home
- Chimney Construction
- Solid Fuel Burning Device Insert
- Pool Deck Roof Porch
- Septic - New Installation Renovation
- Other _____
- Visual Safety Inspection

X _____
Applicant

Inspector

**SECTION R310
EMERGENCY ESCAPE AND RESCUE OPENINGS**

R310.1 Emergency escape and rescue openings required. Basements with habitable space and every sleeping room shall have at least one openable emergency escape and rescue opening. Where emergency escape and rescue openings are provided they shall have a sill height of not more than 44 inches (1118 mm) above the floor. Where a door opening having a threshold below the adjacent ground elevation serves as an emergency escape and rescue opening and is provided with a bulkhead enclosure, the bulkhead enclosure shall comply with Section 310.3. The net clear opening dimensions required by this section shall be obtained by the normal operation of the emergency escape and rescue opening from the inside. Emergency escape and rescue openings with a finished sill height below the adjacent ground elevation shall be provided with a window well in accordance with Section R310.2.

R310.1.1 Minimum opening area. All emergency escape and rescue openings shall have a minimum net clear opening of 5.7 square feet (0.530 m²).

Exception: Grade floor openings shall have a minimum net clear opening of 5 square feet (0.465 m²).

GRADE FLOOR OPENING. A window or other opening located such that the sill height of the opening is not more than 44 inches (1118 mm) above or below the finished ground level adjacent to the opening.


R310.1.2 Minimum opening height. The minimum net clear opening height shall be 24 inches (610 mm).

R310.1.3 Minimum opening width. The minimum net clear opening width shall be 20 inches (508 mm).

R310.1.4 Operational constraints. Emergency escape and rescue openings shall be operational from the inside of the room without the use of keys or tools.

R310.2 Window wells. Window wells required for emergency escape and rescue shall have horizontal dimensions that allow the door or window of the emergency escape and rescue opening to be fully opened. The horizontal dimensions of the window well shall provide a minimum net clear area of 9 square feet (0.84 m²) with a minimum horizontal projection and width of 36 inches (914 mm).

Exception: The ladder or steps required by Section R310.2.1 shall be permitted to encroach a maximum of 6 inches (152 mm) into the required dimensions of the window well.

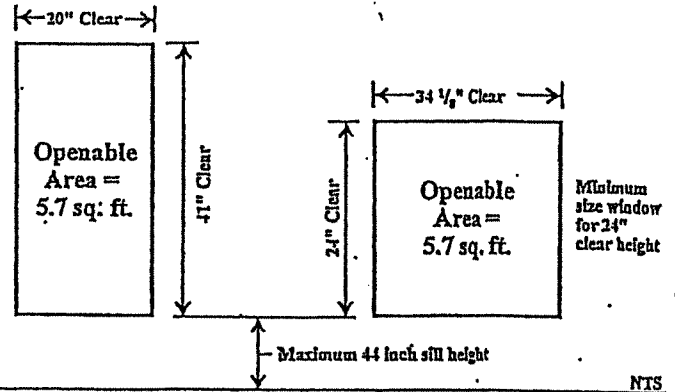

R310.2.1 Ladder and steps. Window wells with a vertical depth greater than 44 inches (1118 mm) shall be equipped with a permanently affixed ladder or steps usable with the window in the fully open position. Ladders or steps required by this section shall not be required to comply with Sections R314 and R315. Ladders or rungs shall have an inside width of at least 12 inches (305 mm), shall project at least 3 inches (76 mm) from the wall and shall be spaced not more than 18 inches (457 mm) on center vertically for the full height of the window well.

R310.3 Bulkhead enclosures. Bulkhead enclosures shall provide direct access to the basement. The bulkhead enclosure with the door panels in the fully open position shall provide the minimum net clear opening required by Section R310.1.1. Bulkhead enclosures shall also comply with Section R314.9.

R310.4 Bars, grills, covers and screens. Bars, grills, covers, screens or similar devices are permitted to be placed over emergency escape and rescue openings, bulkhead enclosures, or window wells that serve such openings, provided the minimum net clear opening size complies with Sections R310.1.1 to R310.1.3, and such devices shall be releasable or removable from the inside without the use of a key, tool or force greater than that which is required for normal operation of the escape and rescue opening.

Note: All requested information relating to your project must be provided before a permit can be issued and before work can be started on the project.
ANY CHANGES TO THE SPECIFICATIONS ON THIS FORM AFTER THE PERMIT IS ISSUED MUST BE APPROVED BY THIS OFFICE!

FOOTINGS:

Width _____
Thickness _____
Type _____
Reinforcement _____
P.S.I. of Concrete _____
Depth below Grade _____
Cont. or Stepped _____

EXTERIOR WALL FRAMING:

Stud Size + Type _____
Spacing _____
Sheathing _____
Type of Siding _____
Interior Sheathing _____

FOUNDATION WALL:

Height _____
Size _____
Block or Poured Wall _____
Wall Thickness _____

FLOOR FRAMING:

Size of Joist _____
Grade of Lumber _____
Species of Lumber _____
Spacing _____
Span _____
Sheathing _____
Covering _____

SLAB:

Type _____
Thickness _____
Expansion Joint/s _____
Type of Vapor Barrier _____
P.S.I. of Concrete _____

RAFTERS:

Size _____
Grade _____
Species _____
Spacing _____
Ridge Board Size _____
Pitch _____

BEARING BEAM:

Material _____
Size _____
Grade _____
Species _____
Spacing of Supports _____

EXTERIOR DOORS:

Main / width+ht. _____
Secondary / width+ht. _____

P.S.I. = Pounds per square foot

CEILING JOIST:

Size _____
Grade _____
Species _____
Spacing _____

TRUSS ROOF SYSTEM:

Snow Load Design _____
Spacing _____

EXTERIOR STAIRS:

Width _____
Tread Size _____
Riser Height _____
Railings _____
Height from stair to header _____

ROOF COVERING:

Sheathing Size+Type _____
Roofing Paper _____
Shingles / Type _____
Vents _____
Flashing _____

WINDOWS:

Header Type _____
Size _____
Height from floor to bottom of window sill _____
Insulated _____

INTERIOR WALL FRAMING:

Stud Size + Type _____
Spacing _____

INTERIOR DOORS:

Type _____
Size _____

INSULATION:

Interior Walls _____
Ceilings _____
Exterior Walls _____
Floors _____
Basement _____
Doors _____

FIRE STOPPING:

Horizontal _____
Vertical _____

VENTILATION:

Soffits _____
Crawl Space _____
Gable End _____
Ridge _____
Attic Fan _____
Baths _____
Kitchens _____

FIREPLACE, CHIMNEYS & STOVES

U.L. Approved _____
Type _____
Flue Type _____
Chimney _____
Height above Roof _____

SMOKE DETECTORS:

Type _____
Locations _____
Number _____